


Perry-Austen Computer Lane Monitor™ Lane Dressing Analysis

Lane Number : 6 **Distance From Foul Line:** 40.0 **Feet** **Date:** 8/2/1906
Establishment Name: QAMF
Approximate Number of Lines Bowled Since Last Conditioned: 0
Readings Taken By: **Time:** 1:32:25 PM
Comment:

L2	6.1
L3	7.0
L4	7.5
L5	8.3
L6	10.6
L7	11.3
L8	12.9
L9	13.0
L10	16.2
L11	17.4
L12	17.3
L13	18.0
L14	18.3
L15	18.5
L16	19.1
L17	19.7
L18	19.8
L19	20.1
C20	20.5
R19	21.0
R18	23.1
R17	22.8
R16	22.2
R15	22.7
R14	21.6
R13	21.6
R12	20.7
R11	18.6
R10	14.6
R9	15.0
R8	14.4
R7	10.2
R6	9.2
R5	7.8
R4	7.2
R3	6.5
R2	6.0

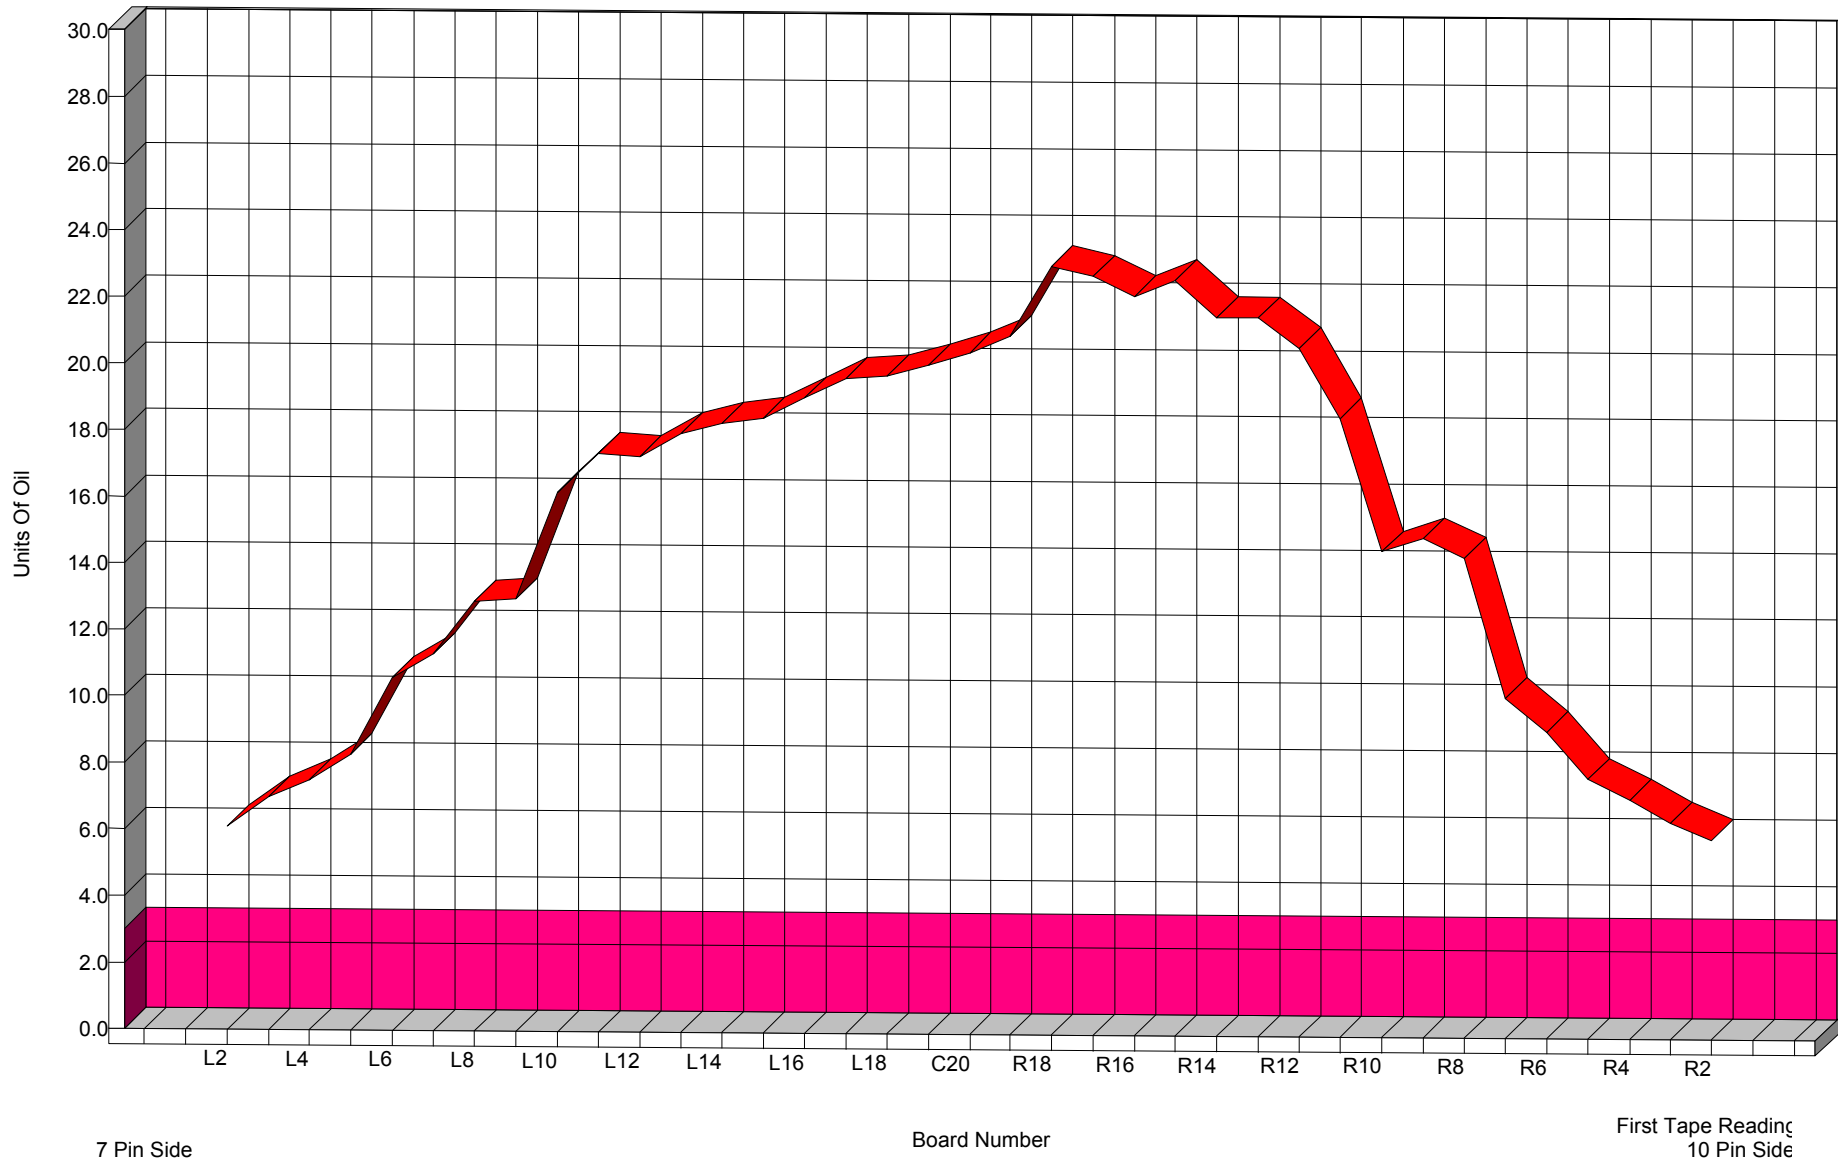

7 Pin Side

Name

		Pass 1		Pass 2	
BUFFER	Mode :	Double		Double	
	Distance - Ft.	Forward 41.0	Reverse 41.0	Forward 21.1	Reverse 24.0
OIL	Mode :	Double		Double	
	Distances - Ft.	Forward	Reverse	Forward	Reverse
	left outside :	17.0	0.0	1.0	0.0
	left track :	23.0	18.0	4.0	0.0
	left inside :	20.0	26.0	17.0	16.0
	right inside :	28.0	30.0	20.0	24.0
	right track :	25.0	22.0	7.0	8.0
	right outside :	17.0	0.0	1.0	0.0
Transfer Rate %	20	25	100	75	

Short Run Mode	Off
Turn-around Distance	0.0 Ft.

Stripping Mode	Full
Start	0.0 Ft.
Cleaner Pad Distance	61.5 Ft.
Vacuum	On Start

Cleaner Flow In oil	100 %
Back lane	100 %

SPEED SETTINGS:		Pass 1		Pass 2	
		Forward	Reverse	Forward	Reverse
Travel		High	High	High	High
Condition		High	High	High	High
Strip		Medium			